

11- 24-00

A

140122/60
00/22/00

Please type a plus sign (+) inside this box ☒

Approved for use through 10/31/2002 OMB D651-003

U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.	10001-22620.2
First Inventor	Vincent Quintana
Title	Apparatus and Method for Using a Wearable..
Express Mail Label No.	EH655106444US

(Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS		ADDRESS TO:	
See MPEP chapter 600 concerning utility patent application contents.		Assistant Commissioner for Patents Box Patent Application Washington, DC 20231	
1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g., PTO/SB/17) <i>(Submit one original and a duplicate for fee processing)</i>	7. <input type="checkbox"/> CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)		
2. <input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.	8. Nucleotide and/or Amino Acid Sequence Submission <i>(if applicable, all necessary)</i>		
3. <input checked="" type="checkbox"/> Specification [Total Pages 31] <i>(Preferred arrangement set forth below)</i>	a. <input type="checkbox"/> Computer Readable Form (CRF)		
- Descriptive title of the invention	b. Specification Sequence Listing on:		
- Cross Reference to Related Applications	i. <input type="checkbox"/> CD-ROM or CD-R (2 copies); or		
- Statement Regarding Fed sponsored R & D	ii. <input type="checkbox"/> paper		
- Reference to sequence listing, a table, or a computer program listing appendix	c. <input type="checkbox"/> Statements verifying identity of above copies		
- Background of the Invention	ACCOMPANYING APPLICATION PARTS		
- Brief Summary of the Invention			9. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))
- Brief Description of the Drawings (if filed)	10. <input type="checkbox"/> 37 CFR 3.73(b) Statement of Attorney <i>(when there is an assignee)</i>	11. <input type="checkbox"/> English Translation Document (if applicable)	12. <input type="checkbox"/> Copies of IDS Citations
- Detailed Description	13. <input type="checkbox"/> Preliminary Amendment	14. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <i>(Should be specifically itemized)</i>	15. <input type="checkbox"/> Certified Copy of Priority Document(s) <i>(if foreign priority is claimed)</i>
- Claim(s)	16. <input type="checkbox"/> Request and Certification under 35 U.S.C. 122 <i>(b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent.</i>	17. <input checked="" type="checkbox"/> Other: unsigned declaration	
- Abstract of the Disclosure			
4. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 4]			
5. Oath or Declaration [Total Pages 4]			
a. <input type="checkbox"/> Newly executed (original or copy)			
b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63 (d)) <i>(for continuation/divisional with Box 18 completed)</i>			
c. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).			
6. <input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76			

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

<input type="checkbox"/> Continuation	<input type="checkbox"/> Divisional	<input type="checkbox"/> Continuation-in-part (CIP)	of prior application No. _____
Prior application information		Group Art Unit _____	

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

19. CORRESPONDENCE ADDRESS

<input type="checkbox"/> Customer Number or Bar Code Label	(Insert Customer No. or Attach bar code label here)	or	<input checked="" type="checkbox"/> Correspondence address below
--	---	----	--

Name	Jenner & Block				
	Patent and Trademark Docket Clerk				
Address	One IBM Plaza, 41st Floor				
City	Chicago	State	IL	Zip Code	60611
Country	USA	Telephone	312/222-9350	Fax	312/527-0484

Name (Print/Type)	Mark P. Vrla	Registration No. (Attorney/Agent)	43,973
Signature	<i>Mark P. Vrla</i>	Date	11/22/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Box Patent Application Washington, DC 20231

JC921 U.S. PTO
11/22/00

00724001

PTO/S&17-11-03i

Approved for use through 10/31/2002 OMB 0651-0032

U.S. Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision.

Complete if Known

Application Number Unknown
 Filing Date November 22, 2000
 First Named Inventor Vincent Quintana
 Examiner Name Unknown
 Group Art Unit Unknown
 Attorney Docket No. 10001-22620.2

TOTAL AMOUNT OF PAYMENT (\$) 710.

METHOD OF PAYMENT

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:
 Deposit Account Number 10-0460
 Deposit Account Name Jenner & Block
- ☐ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17
- ☐ Applicant claims small entity status See 37 CFR 1.27
2. ☐ Payment Enclosed:
☐ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity	Small Entity	Fee Code	Fee Code	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	<u>710.</u>
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Resubmit filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$) 710.

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
1	20** =	0	0
0	3** =	0	0
Multiple Dependent		0	0

Large Entity	Small Entity	Fee Code	Fee Code	Fee Description
103	18	203	9	Claims in excess of 20
102	80	202	40	Independent claims in excess of 3
104	270	204	135	Multiple dependent claim, if not paid
109	80	209	40	** Reissue independent claims over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 710.

*for number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity	Small Entity	Fee Code	Fee Code	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for ex parte reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Processing fee under 37 CFR 1.17(q)	
126	180	126	180	Submission of Information Disclosure Stmt.	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify) _____

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)

SUBMITTED BY

Name (Print/Type) Mark P. Vela
 Signature Mark P. Vela

Registration No. (Attorney/Agent) 43,973

Complete if applicable

Telephone 312/222-9350Date 11/22/00

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

PATENT

Attorney Docket
No. 10001-22620.2

**APPLICATION FOR
UNITED STATES LETTERS PATENT
FOR
APPARATUS AND METHOD FOR
USING A WEARABLE COMPUTER IN
COLLABORATIVE APPLICATIONS
SPECIFICATION**

TO WHOM IT MAY CONCERN:

Be it known that W. Vincent Quintana, a citizen of the United States of America, resident of Bath, Maine, F. Christopher Mitchell, a citizen of the United States of America, resident of Arlington, Virginia, Michael Edward Pinkham, a citizen of the United States of America, resident of Bath, Maine, J. Scott Houston, a citizen of the United States of America, resident of Topsham, Maine, Mark A. Norton, a citizen of the United States of America, resident of Cushing, Maine, and Joseph Petruska, a citizen of the United States of America, resident of Sabbathus, Maine, have invented a certain new and useful invention of which the following is a specification:

APPARATUS AND METHOD FOR USING
A WEARABLE COMPUTER
IN COLLABORATIVE APPLICATIONS

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to wearable computers, and more particularly to a wearable computer for use in collaborative applications.

10

2. Description of the Related Art

Construction and manufacturing projects require that structures and components be built to exacting specifications and strict time schedules. Manufacturing industries, including, for example, shipbuilding, aircraft manufacturing, and automobile manufacturing, often involve modular construction where individual components of a final product are built simultaneously and at different physical locations. These components must be constructed in a precise manner to ensure that the individual components will fit together properly. When problems arise during the construction of these individual components, the manufacturers must respond quickly to ensure that the problem is properly resolved, design changes are properly recorded, and the project does not fall behind schedule. The same concerns apply to other construction projects where various components of the project are constructed simultaneously and often at separate locations.

20

The traditional response to a problem that arises during manufacturing or construction is a telephone call from the onsite individual who discovers the problem to an engineer or other individual responsible for resolving the problem. Ideally, the engineer is located near the job site and can travel to the site without undue inconvenience. However, often the engineer is located a great distance from the site of the problem and cannot respond

25

in an expedient manner. Regardless of the engineer's location, the engineer typically must travel to the job site, make notes by hand, and then return to the engineer's office to review plans and other technical information to resolve the problem. The engineer often must make repeated visits to the job site to gather further information regarding the problem before any solution can be formulated. This traditional method of problem resolution often consumes a considerable amount of time, thus wasting precious production time.

Wearable computers are computers that may be physically worn on the body of the person operating the computer. Wearable computers are preferred when there is insufficient space to set up a lap top or desk top computer. Wearable computers have been used for report preparation and other data gathering activities. However, the use of a wearable computer only for data gathering functions does not meet the needs of problem resolution in a manufacturing or construction setting. In addition, even if a wearable computer that had the technical information regarding the structure or project were available on-site, it would be of limited use absent the ability to collaborate with one or more other individuals who could offer expertise and insight into resolving the problem.

Therefore, it would be desirable to provide a person at the location of interest with the ability to use a wearable computer in a real time collaborative manner with one or more off-site individuals who could help to resolve the issue presented or otherwise assist in the task to be performed by the on-site individual.

SUMMARY OF THE INVENTION

The present invention is a method and apparatus for using a wearable computer in collaborative problem resolution and collaborative design applications. In a preferred embodiment, the present invention comprises a general inspection camera; a

detailed inspection camera; a display; a device to be used for wireless audio communication; a computer adapted to exchange data using wireless communication and adapted to facilitate collaborative applications between an individual at the location of interest and an individual
5 at a remote location; a battery to supply power to the general inspection camera, the detailed inspection camera, the display, the wireless audio communications device, and the computer; and a harness to support any or all of the foregoing components from the body of a person.

The present invention permits an individual who is on-site at a manufacturing, construction, or inspection project (hereinafter "liaison") to collect data for use in
10 collaborative problem resolution or collaborative design survey or design audit applications (hereinafter "design audits"), to share this data using wireless communication with an engineer or other individual who will assist in the problem resolution or design audit (hereinafter "remote engineer"), and to collaborate with such individuals, in real time, using the data collected by the liaison to resolve the encountered problem or complete the design
15 audit. The present invention also may be used by multiple liaisons and/or multiple remote engineers to resolve a common problem or complete a common design audit.

While the present invention may be used in a wide range of manufacturing, construction, and inspection applications as well as a wide range of design audit applications, the following description of the use of the present invention in the shipbuilding industry
20 illustrates one use of the present invention. As with other large scale manufacturing and construction operations, the construction of a ship is divided into manageable units. These individual units that are later assembled into the complete ship must be constructed to precise specifications. Whenever any design problems or issues arise during the construction of these units, a designer or other person responsible for quality control (hereinafter "design
25 representative") generally is contacted to resolve the problem or issue. Traditionally, the

design representative typically would be dispatched to the work site to make an initial assessment of the problem. The design representative typically would make a few hand sketches and then return to the office to review the latest drawings and to research a mainframe database for outstanding drawing revision notices that could either resolve or compound the encountered problem. In difficult situations, the design representative may even be forced to make another trip to the problem location to conduct a further review and then return to the engineering offices to review, for example, three dimensional computer aided design ("CAD") models that often are used in design control. While the design representative endeavors to resolve the problem, which may take several hours or even longer, the production process is interrupted, potentially causing overall production schedule to be delayed.

Using the present invention, the time and effort required to resolve any design or other problems arising during the construction of the above mentioned ship units can be significantly reduced. For example, when a design or other problem is encountered during the construction of a ship unit, an individual (hereinafter "liaison") using an apparatus according to a preferred embodiment of the present invention can be dispatched to the location of the problem or other issue. The apparatus preferably includes a general inspection camera, a detailed inspection digital camera, a visual display, a wearable computer, a wireless telephone or other device for audio communication, and a harness supporting the general inspection camera, detailed inspection digital camera, display, wearable computer, and wireless telephone or other device for audio communication from the liaison's body. Once the liaison has had a chance to assess the situation, the liaison may use the present invention to access plans and/or specifications or any other information stored either locally or remotely on a database that may offer assistance in resolving the situation. These plans and/or

specifications can be stored locally on the wearable computer or at another, remote database.

The liaison likewise may use the wireless telephone or other means for wireless audio communication to contact and collaborate with a remote engineer who can assist in the resolution of the issue. The present invention can be used simultaneously by multiple liaisons and/or remote engineers to resolve related issues in real time.

In a typical situation, the liaison would first use the general inspection camera to provide real time video to the remote engineer using wireless communication to give the remote engineer a general understanding of the proximity and nature of the problem. The liaison then can use the detailed inspection camera to take high resolution snap-shots that can be downloaded to the liaison's wearable personal computer. Using a software application that permits real time collaboration, the liaison may then transmit the snapshots to the remote engineer. The liaison may likewise annotate the snapshots, with the collaboration software enabling the remote engineer to view the annotations in real time. The remote engineer may likewise annotate the snapshots, which also may be viewed in real time by the liaison.

Either the remote engineer or liaison may also access plans and specifications for use in resolving the encountered issue. These plans and specifications may likewise be annotated in real time, thus allowing for a collaborative resolution of the issue presented. While the above example is set in the shipbuilding context, the present invention may likewise be used in other fields including, without limitation, aircraft and automobile manufacturing, construction, and inspection applications.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front view of the present invention as worn on the body of a person;

FIG. 2 is a rear view of the present invention as worn on the body of a person;

FIG. 3 is a schematic diagram of a display unit stored in a housing; and

FIG. 4 is a schematic diagram of an apparatus to support components from the body of a person according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is a method and apparatus for using a wearable computer in collaborative applications. For example, the present invention may be used in areas such as ship, aircraft, and automobile manufacturing, construction projects, and inspection, design, audit, and quality assurance projects. The present invention may be used to decrease the response time to production and other problems encountered during manufacturing, construction, and inspection projects. The present invention permits a liaison who is on-site at a manufacturing, construction, inspection site, or other location of interest to collect data for use in problem resolution or other collaborative applications; transmit the collected data using wireless communication means that include, without limitation, wireless local area network ("WLAN") communication, ad hoc wireless communication, peer to peer wireless communication, and narrow and/or broadband wireless communications, all including both secure and unsecure transmission, to an engineer or other individual at any location who will assist in the problem resolution or collaborative collection of data regarding the location of interest (hereinafter "remote engineer"); and collaborate with the remote engineer to resolve the problem or collect data regarding the location of interest. The present

invention also permits the liaison to engage in a collaborative “design audit” or “design survey” with a remote engineer. In this collaborative design audit or design survey, the liaison collaborates with a remote engineer to collect data regarding an existing structure or other object of interest for use in future designs or other planning. The present invention also may be used to permit multiple liaisons and/or multiple remote engineers to collaborate in real time.

Referring to FIG. 1, FIG. 2, and FIG. 4, the present invention preferably comprises a general inspection camera 1000, a detailed inspection camera 2000 preferably stored in a detailed inspection camera storage case 2200, a wireless telephone 3000 or other means for wireless audio communication preferably mounted in a wireless telephone housing 3200, a display unit 4000 preferably stored in a display housing 4200, a computer 5000 preferably stored in a computer housing 5200, a battery 6000 preferably stored in a battery housing 6200, an interface hub 7000 preferably stored in a hub housing 7200 and a harness 8000 that supports any or all of the foregoing and/or other components from the body 10 of the liaison using the present invention.

1. Cameras

Referring to FIG. 1, general inspection camera 1000 and detailed inspection camera 2000 can be used to collect video data that is transmitted using wireless communication to the remote engineer for use in collaborative problem resolution or other collaborative applications. Unless specified otherwise herein, the term “video” includes, without limitation, NTSC, PAL, H.320, H.323, H.324, T.120, or composite or component video as required. General inspection camera 1000 preferably is used to provide real time video data to the remote engineer to provide the remote engineer with an overall idea of where the problem is located and the general nature of the problem or an overall perspective

of the location of interest. Detailed inspection camera 2000 preferably is used to provide detailed “snapshots” of the location of interest to the remote engineer to allow the remote engineer to assess the precise nature of the problem or gather precise data regarding the location of interest. For example, the liaison wearing the present invention can first use general inspection camera 1000 to provide real time video to the remote engineer using wireless communication. Once the remote engineer understands the general nature of the problem and the general location of the problem, the liaison can use detailed inspection camera 2000 to take high-resolution “snapshots” of the encountered problem. The liaison will then upload these high resolution snapshots to computer 5000 for subsequent transmission using wireless communication to the remote engineer.

As shown in FIG. 1, general inspection camera 1000 preferably is mounted upon a left shoulder strap 8300 of harness 8000. However, general inspection camera 1000 may likewise be mounted upon right shoulder strap 8400 or at any other location suitable for collecting video data. General inspection camera 1000 preferably is secured to a camera mounting pad 1200 using elastic straps (not shown), but may also be secured to camera mounting pad 1200 using any other suitable fastening means including hook and piling fastener tape, snaps, buttons, zippers, and clips. Camera mounting pad 1200 preferably is secured to shoulder strap 8300 using hook and pile fastener tape that is secured to the lower surface of camera mounting pad 1200 and the outer surface of shoulder strap 8300. However, any suitable fastening means may be used to secure camera mounting pad 1200 to shoulder strap 8300 including, without limitation, zippers, buttons, snaps, and clips.

Referring to FIG. 2, general inspection camera 1000 transmits video data to computer 5000 using video cable 1100. In one embodiment of the present invention, video cable 1100 is a USB cable. However, video cable 1100 may be any means suitable for

transmitting video data including, without limitation, a USB v. 2.0 or “firewire” interface. In a preferred embodiment of the present invention, general inspection camera 1000 is a 3Com Home Connect web camera, available from 3Com, Inc., 5400 Bayfront Plaza, Santa Clara, California, 95052-8145. The software drivers of this camera fully support Microsoft Windows “plug and play,” which permits the “hot swapping” of USB devices. In addition to the 3Com Home Connect web camera, any camera suitable for collecting and transmitting real time video data may be used as general inspection camera 1000. Preferably, general inspection camera 1000 is characterized by features including low bandwidth, low light sensitivity, rugged construction, compatibility with existing interface ports, water resistance, thermal resistance to both high and low temperatures, shock resistance, and a low profile. In another embodiment of the present invention, general inspection camera 1000 may be a high resolution video camera.

As shown in FIG. 1, detailed inspection camera 2000 preferably is used to collect detailed “snapshots” of the problem to be resolved. Detailed inspection camera 2000 preferably is stored in camera storage case 2200 when not in use. Camera storage case 2200 preferably is secured to harness 8000, as will be discussed further below.

When detailed imagery snapshots are desired, the liaison preferably removes detailed inspection camera 2000 from camera storage case 2200, powers up camera 2000 if the power is not already turned on, and takes the desired snapshots. After the desired snapshots are taken, the snapshots are downloaded to computer 5000 using video cable 2100. Camera 2000 can have its own power source, or it can be powered by battery 6000. If camera 2000 uses its own power source, video cable 2100 does not need to be connected to camera 2000 while the snapshots are taken. In this embodiment, the snapshots may be reviewed before they are downloaded to computer 5000 and then transmitted using wireless

communication. This embodiment preferably is used to ensure that confidential or otherwise restricted access information is not accidentally downloaded or transmitted. If camera 2000 receives its power from battery 6000, such power can be provided via video cable 2100 connecting camera 2000 to computer 5000, which in turn is connected to battery 6000 via cable 6100. In this embodiment, camera 2000 is connected to computer 5000 while the snapshots are taken.

Once the desired snapshots are taken, the snapshots can be downloaded to computer 5000 using video cable 2100. Once the snapshots are downloaded to computer 5000, the liaison may view the snapshots on display unit 4000. In a preferred embodiment of the present invention, the liaison can then annotate the snapshots using a touch screen display unit 4000. For example, the snapshots taken with camera 2000 can be annotated using the Netmeeting software application, available from Microsoft, Inc., One Microsoft Way, Redmond, Washington, 98052-6399. Netmeeting is preferred because of its "whiteboarding" feature, which permits individuals using the Netmeeting software to bring up a bitmap image, which is the snapshot taken by camera 2000, and share the ability to mark-up and annotate the image. In the present invention, the use of this "whiteboarding" feature permits live collaboration and allows the liaison and remote engineer to mark-up and annotate the snapshot in real time, thus allowing both the liaison and remote engineer to view the annotations as they are made. For example, the remote engineer could sketch dimensions and highlight areas of concern on the snapshot while the snapshot is being viewed by the liaison. The annotations made to the snapshots may then be stored for future reference. In addition to Netmeeting, any other software application that allows the annotation of images in real time including, without limitation, PlaceWare, available from PlaceWare, Inc., 295 N. Bernardo Ave., Mountain View, California, and Microsoft Exchange, may be used in the present

invention. Another software application that may be used for live collaboration is Infoworkspace, available from General Dynamics Electronic Systems, 100 Ferguson Drive, P.O. Box 7188, Mountain View, California, 94039-7188, which is a java-based software application that allows the use of a "thin-client" so that specialized collaboration software does not have to reside on computer 5000 and can be installed as needed.

In a preferred embodiment of the present invention, the remote engineer may use a touch sensitive smart board available from SMART Technologies, Inc., Suite 600, 1177-11th Ave. S.W., Calgary, Alberta, Canada, to annotate images.

In a preferred embodiment of the present invention, detailed inspection camera 2000 is a 990 Nikon Cool Pix, available from Nikon, Inc., 1300 Walt Whitman Road, Melville, New York, 11747-3064. The 990 Nikon Cool Pix preferably is used as camera 2000 because of its sophisticated auto-flash capability, battery life, 3.3 Megapixel resolution, and USB output. However, any digital camera that is capable of taking high resolution still and video imagery, has low light sensitivity, has a long battery life, is rugged and water resistant, and preferably capable of sharing the power source of computer 5000 may be used as camera 2000. Video cable 2100 preferably is a USB cable, but also may be any other suitable medium for transmitting video data.

In another embodiment of the present invention, a single camera (not shown) can be used in place of individual camera 1000 and 2000. This single camera (not shown) would be capable of transmitting both real time video and high resolution video images. In addition, this camera (not shown) would preferably have low light sensitivity, be able to share a power source with computer 5000, have a long battery life, and be rugged and waterproof.

In another embodiment of the present invention, a single camera used in place of camera 1000 and camera 2000 can be integrated into display unit 4000.

2. Audio Communications

As shown in FIG. 1, a wireless telephone 3000 that preferably is mounted in telephone housing 3200 preferably is used in the present invention to allow audio communication between the liaison and remote engineer. In addition to a wireless telephone, any other means for wireless audio communication, including, without limitation, a two-way radio and cellular telephone, may be used in place of wireless telephone 3000. A headset 3300 comprising an earphone 3320 and microphone 3310 preferably is plugged into wireless telephone 3000 using audio cable 3100 to permit hands-free audio communication between the liaison and remote engineer. In a preferred embodiment of the present invention, headset 3300 is an Andrea Electronics Corp. headset, model no. ANC100, available from Andrea Electronics Corp., 45 Melville Park Road, Melville, New York, 11747, used with a stereo-to-mono audio adapter.

In one embodiment of the present invention, wireless telephone 3000 preferably is incorporated into a cascading call-forwarding protocol system. In this embodiment, the liaison initially places a telephone call to an assigned remote engineer for assistance in the problem resolution. If this remote engineer is unable to answer the call, the call is automatically forwarded to a back-up remote engineer who will assist the liaison. If the back-up remote engineer is unable to answer the call, the call will continue to be forwarded up the chain-of-command until it is answered and a support team can be put in place. The use of this cascading call-forwarding system ensures that there will always be a remote engineer available to offer immediate assistance to the liaison. In a preferred embodiment of the present invention, wireless telephone 3000 preferably is provided by Spectralink, Inc., 5755 Central Avenue, Boulder, Colorado, 80301-2848.

As shown in FIG. 1, wireless telephone housing 3200 preferably is used to support wireless telephone 3000 from harness 8000. As shown in FIG. 1, telephone housing 3200 preferably is configured to permit telephone 3000 to be extended from the body of the liaison and to be stored in an upright position (not shown) when not in use and after communications have been established. In a preferred embodiment of the present invention, the angle at which telephone 3000 extends from the liaison's body when in use may be adjusted through the use of a support cord 3235 and barrel stops 3230 and 3238. Using barrel stops 3230 and 3238, the length of support cord 3235 may be adjusted, thereby controlling the angle at which telephone 3000 extends from the body of the liaison.

Although not shown in FIG. 1, telephone 3000 may be stored upright against the body of the liaison by folding a support flap 3210 inwards toward the body of the liaison. Telephone 3000 is preferably stored in this upright position when telephone 3000 is not in use and when telephone 3000 is in use after communication has been established with the remote engineer. Hook and pile fastener tape preferably is mounted upon the outer surface of a telephone mounting strap 3215 and mounting strip 3220. In addition to hook and pile fastener tape, any suitable fastening means may be used to secure telephone mounting strap 3215 to mounting strip 3220 including, without limitation, zippers, buttons, snaps and clips.

In another embodiment of the present invention, audio communications between the liaison and remote engineer preferably are made using WLAN integrated Voice Over Internet Protocol ("VoIP") technology. The use of WLAN integrated VoIP technology would eliminate the need to use wireless telephone 3000 in the present invention. In this embodiment, headset 3300 preferably would be modified to be USB compatible and audio cable 3100 preferably would be a USB cable. In this embodiment, headset 3300 would be connected to computer 5000 using audio cable 3100.

The following is a detailed discussion regarding the use of VoIP technology according to the present invention. The present invention preferably would employ key enabling technology achieve the current wireless connectivity is the IEEE 802.11b Standard for Wireless Local Area Networks. IEEE 802.11b is a national standard for wireless data transmission broadcasting over the 2.43Ghz radio frequency. The IEEE standard has been adopted by companies such as CISCO, Harris, Symbol and others to allow mobile PC's to connect to standard IEEE 802.3 Ethernet LANs. The basic system architecture of 802.11b starts with a wireless hub, called an Access Point ("AP") that plugs into a standard Ethernet port via an RJ-45 cable connection. The Access Point allows a mobile computer equipped with a PCMCIA client card, called a Mobile User ("MU"), to send and receive data to a conventional Ethernet network via a properly configured AP. The 802.11b standard allows wireless data throughput up to 11Mbps, dividing the available bandwidth among all MU's associated with a particular AP. Association to a particular AP is established through a unique software setting called an SSID. Only MU's and AP's with the same SSID can exchange information. There are various schemes that can be employed using SSID's, channel designations, and the physical placement of AP's to extend the range and signal density of a wireless network. All of these factors are taken into account when designing a wireless network. A Wireless Bridge can be used to relay data between wireless networks. Wireless Bridges (WB's) also have a unique ability to be configured either for wireless relay or to operate as autonomous Access Point. This operation can be accomplished remotely through a web based interface (each AP and WB has it's own IP address) or locally through an RS232 serial connection. This application can also be used to monitor the identity and number of users on the system to insure system security and quality of service. Most commercially available bridges are designed for indoor/outdoor use and can withstand cold

temperatures. 802.11b is considered to be a leading wireless networking technology for use in harsh industrial and marine environments. The following components preferably are used with the present invention:

- 1) CISCO 340 Series PCMCIA Client Card, 100Mw, available from Cisco Systems, 170 West Tasman Dr., San Jose, California, 95134, and
- 2) CISCO 340 Series Wireless Bridge, 100 Mw.

Access Points and Wireless Brides preferably can be configured to encrypt data through either software or hardware based security schemes. In another embodiment of the present invention, headset 3300 may be incorporated into a hearing protection headset, hardhat, or other head and hearing protection system.

3. Display Unit

As shown in FIG. 3, display unit 4000 is used to provide data to the liaison wearing the present invention and to exchange data between the liaison and remote engineer.

Display screen 4010 of display unit 4000 preferably utilizes a thin film transistor ("TFT") touch sensitive display surface, thus combining both video and "mouse" functions into display unit 4000. The liaison using the present invention preferably interfaces with display unit 4000 using a pen stylus 4020 on display screen 4010. As shown in FIG. 3, display unit 4000 preferably is stored in display housing 4200. Display unit 4000 is connected to computer 5000 using display cable 4100.

Display unit 4000 is used to provide data to the liaison and to exchange data between the liaison and the remote engineer. For example, after the liaison has taken snapshots of a problem using detailed inspection camera 2000 and downloaded the snapshots to computer 5000, display unit 4000 may be used to view the snapshots before they are transmitted to the remote engineer. When display screen 4010 uses a TFT touch sensitive

display surface, the liaison may use the "whiteboarding" feature of Microsoft Netmeeting to make annotations using pen stylus 4020 on the snapshot that can be viewed by the remote engineer in real time. When exchanging data with the remote engineer, the liaison preferably may use a software application such as Netmeeting to view plan changes made by the remote engineer to address the problem to be resolved through the real time collaboration. The data from the real time collaboration also may be stored for future reference.

In a preferred embodiment of the present invention, display unit 4000 is a ViA II PC Pen Tablet with an Indoor Readable display, available from ViA, Inc., 12550 West Frontage Road, Ste. 201, Burnsville, Minnesota 55337. The Indoor Readable display is preferred because of its backlight feature. A Sunlight Readable display, also available from ViA, Inc., may be used as display 4000 in situations where the present invention is being used outdoors where sunlight may interfere with the ability of the liaison to view display screen 4010. In another embodiment of the present invention, a transfective screen, available from ViA, Inc., or a Hewlett Packard No Power display, available from Hewlett Packard, 3000 Hanover Street, Palo Alto, California 94304-1185, may be used as display unit 4000.

As shown in FIG. 1 and FIG. 3, display unit 4000 preferably is stored in display housing 4200 to support display unit 4000 from harness 8000. As shown in FIG. 1, display housing 4200 preferably is configured to permit display unit 4000 to be extended from the body 10 of the liaison when in use for hands-free operation and to permit display unit 4000 to be stored in a position flat against the body 10 of the liaison when not in use (not shown). In a preferred embodiment of the present invention as shown in FIG. 3, the angle at which display unit 4000 extends from the body 10 of the liaison, and the angle at which display unit 4000 may be viewed when in use, may be adjusted through the use of a support cord 4235 and barrel stops 4230 and 4238. Using barrel stops 4320 and 4238, the length of

support cord 4235 may be adjusted, thereby controlling the angle at which display unit 4000 extends from the body of the liaison.

Also as shown in FIG. 3, display is fastened to display housing using fastening
5 straps 4240. Fastening straps 4240 preferably are permanently secured to display housing 4200 at one end and removably fastened to display housing 4200 at the other end using hook and pile fastener tape or any other suitable fastening means including, without limitation, snaps, buttons, and clips. In another embodiment of the present invention, display 4000 may be removed from display housing 4200 for use in displaying information to others by either
10 unfastening fastening straps 4240 or sliding the display in a lateral direction when fastening straps 4240 are loosened.

Although not shown in FIG. 1 or FIG. 3, when display unit 4000 is not in use, display unit may be stored in a flat position against the body 10 of the liaison by folding a support flap 4210 inwards towards the body 10 of the liaison. A mounting strip preferably
15 made of hook and pile fastener tape preferably is mounted upon the outer surface of a storage flap 4125 and mounting strip 4220. In addition to hook and piling fastener tape, any suitable fastening means may be used to secure storage flap 4125 to mounting strip 4220 including, without limitation, zippers, buttons, and snaps.

In another preferred embodiment of the present invention, a head mounted
20 display 3330 may be used in lieu of display 4000. As shown in FIG. 1, head mounted display 3330 may be mounted on an arm 3335 extending from headset 3300. In addition, head mounted display 3330 may be incorporated into a pair of safety glasses. The use of head mounted display 3330 would enable the liaison to use “augmented reality” software applications. As an example, the liaison would be able to upload three-dimensional computer
25 aided design (“CAD”) models and overlay them over the scene that the liaison is viewing to

assist in the resolution of engineering problems. In a preferred embodiment of the present invention, a Liteye 300, available from Liteye Microdisplay Systems, LLC, 12415 Dumont Way, Unit #103, Littleton, Colorado 80125, may be used as head mounted display 3330. The head mounted display used in this embodiment of the present invention may use technology including, but not limited to, curvilinear prism technology, liquid crystal display technology, or retinal scan display technology.

The present invention likewise may incorporate a wrist mounted keyboard (not shown), a wrist mounted finger mouse (not shown), or any other ergonomically adapted keyboard or mouse (not shown).

4. Computer

As shown in FIG. 2, computer 5000 is used in the present invention to provide information to the liaison wearing the present invention and to facilitate the exchange of information between the liaison and the remote engineer or to permit the liaison to continue working independent of the remote computer network as required. Computer 5000 preferably is a wearable computer. As shown in FIG. 2, computer 5000 preferably is stored in computer housing 5200 to support computer 5000 from harness 8000.

While numerous wearable computers capable of wireless communications may be used as computer 5000, computer 5000 preferably is a ViA IIB or ViA IIC (Transmeta processor) wearable personal computer, available from ViA, Inc., 12550 West Frontage Road, Ste. 201, Burnsville, Minnesota 55337, or a ViA IIR wearable personal computer, available from General Dynamics Information Systems, 8800 Queen Avenue South, Bloomington, Minnesota, 55431. The ViA IIR is a ruggedized modified version of the ViA IIB.

The ViA IIB is preferable as computer 5000 because it uses a Cyrix processor, which generally consumes less power and generally has a cooler operating temperature than processors available from Intel and AMD. The ViA IIB preferably is used for computer 5000 because it possesses the following capabilities. The ViA IIB is Microsoft Windows 9X compatible and currently uses Windows 98 as its operating system. The ViA IIB has two internal PCMCIA slots to accommodate a 100 mW wireless LAN card. Using , for example, an Aironet wireless communication system, available from Cisco Systems, Inc., 170 West Tasman Drive, San Jose, California, 95134, computer 5000 is able to transmit and receive data over a WLAN connection using the IEEE 802.11(x) protocol.

In another preferred embodiment of the present invention, computer 5000 may be the ViA IIC, which incorporates a Transmeta Crusoe processor. Like the ViA IIB, the ViA IIC has two PCMCIA slots to accommodate WLAN communication. The ViA IIC is preferable because it uses a faster processor, produces less heat, and is capable of using a variety of operating systems including Windows 95, Windows 98, Windows 2000, Windows NT 4.0, and Sun, Hewlett-Packard, Apple Macintosh, and IBM operating systems.

A ViA IIR preferably may be used as computer 5000 because it is "ruggedized" to withstand a greater shock than a conventional wearable personal computer can be expected to withstand. The ViA IIR takes the basic core unit of a commercial ViA IIB and consolidates it into a 3.8" x 5.9" x 1.6" box machined from a solid block of aluminum that is sealed to be water tight and able to withstand shock. A hollow cell is machined into the box containing the motherboard, processor, chipset, RAM and all other associated electronic components. This cell is waterproof and the motherboard is designed to use the thermal mass of its container as a heat sink.

To further enhance high heat performance, a cooling tunnel, located adjacent to the processor cell, is incorporated into the design of the ViA IIR. The tunnel contains a large aluminum heat sink and a compact cooling fan generating a steady air stream over its fins. In order to facilitate air exchange, the cooling tunnel is not sealed. The cooling fan is rugged enough to withstand repeated exposures to water and can be easily replaced if it is damaged. Preferably, a cooling fan providing greater airflow than the fan used in a standard ViA IIB is used to provide increased cooling capacity, thus allowing the ViA IIR to operate in a high temperature environment. A Cyrix or Transmeta processor preferably is used in the ViA IIR because of their low power draw resulting in longer battery life and cooler running temperatures. This makes the ViA IIR preferable over other conventional wearable personal computers that use Intel and AMD processors that generally consume more power than the Cyrix processor.

The ViA IIR preferably may be used for computer 5000 because it is possesses the following capabilities. The ViA IIR is Microsoft Windows 9X compatible, and currently uses Windows 98 as its operating system. In addition, the ViA IIR is also capable of using Windows NT 4.0 as its operating system. The ViA IIR has an internal PCMCIA slot to accommodate a 100 mW wireless LAN card. Using, for example, an Aironet wireless communication system, available from Cisco Systems, Inc., 170 West Tasman Drive, San Jose, California, 95134, computer 300 is able to transmit and receive data over a WLAN connection using the IEEE 802.11 protocol.

The present invention preferably uses wireless communication to permit collaborative problem or data gathering resolution between the liaison wearing the present invention and the remote engineer. The following is an example of how the liaison and remote engineer may collaborate to resolve a problem. After identifying a problem on the job

site or arriving at the location of interest and contacting the remote engineer using wireless telephone 3000 or other wireless audio communication means such WLAN integrated VoIP communication using computer 5000, the liaison may first transmit real time video using
5 general inspection camera 1000. The real time video is transmitted using wireless communication from computer 5000 to the computer system being used by the remote engineer. Computer 5000 may use software such as Netsnap, available from PeleSoft,, 2115 Palm Bay Rd., N.E., Palm Bay, Florida 32905, for the streaming of video using wireless communication.

10 The liaison may then collect high-resolution imagery snapshots of the problem using detailed inspection camera 2000 and download the snapshots to computer 5000. The liaison may then review the downloaded snapshots on display unit 4000 and make annotations to the snapshots using the “whiteboarding” feature of Microsoft Netmeeting. The annotations may be viewed by the remote engineer in real time using whiteboarding. The
15 remote engineer likewise may make additional annotations to the snapshots using “whiteboarding” that can be viewed by the liaison in real time. These annotations may then be stored by either the liaison, remote engineer, or both for future reference.

Computer 5000 preferably may also be used to exchange technical information such as project plans and technical specifications between the liaison and design engineer. In
20 one embodiment of the present invention, the liaison could open a CAD application such as Autocad, available from Autodesk, Inc., 111 McInnis Parkway, San Raphael, California, and select to share this application while using Netmeeting, causing the AutoCAD application to “pop-up” on the remote engineer’s conferencing window. The remote engineer may then take control of the Autocad application that is being hosted on computer 5000 and make
25 changes to the design plans that could be viewed by the liaison and any other persons

participating in the "Netmeeting." The Netmeeting application also permits instant text messaging, which would enable the liaison to contact and collaborate with the remote engineer online rather than using wireless telephone 3000 or other means of audio communication. Netmeeting also permits files to be transferred between computer 5000 and the remote engineer's computer. In addition to AutoCAD, any other suitable software package featuring "application sharing" may be used according to the present invention. One such software package is Visualizer, available from Parametrics Technology Corp., 128 Technology Drive, Waltham, Massachusetts, 02453.

In addition to collaboration through "whiteboarding," the liaison and remote engineer may also collaborate using a more sophisticated version of "whiteboarding" known as "redlining." "Redlining" generally allows users to mark up vector based images (and certain bitmap formats such as CALS C4) using software applications such as Autodesk's Volo View, TMS View Director, available from TMSS Headquarters, 206 W. 6th Ave., Stillwater, Oklahoma, 74074, Intergraph's ImageR, available from Intergraph, Inc., 8252 Hwy. 20 West, Madison, Alabama, and CPC View, available from Cartesian Products, Inc., 30 Wesley Street, Ste. 2, Newton, Massachusetts 02458. Product View, available from Parametric Technology Corp., may also be used for redlining applications or any other type of application sharing. "Redlining" is usually focused on the mark up of technical drawings because it can facilitate CAD and Computer Aided Engineering ("CAE") options such as layer assignment, revision history, dimensioning, and dynamic panning and zooming. Layers preferably can be designated so that another designer cannot override the changes made by the liaison or remote engineer. In addition to collaborating with the remote engineer using the above applications, the liaison preferably may likewise independently access these applications before collaborating with the remote engineer. Independently accessing these

applications before contacting the remote engineer may allow the liaison to view the latest drawings and revision change notices to discover what may be a "prior fix" to the problem currently being encountered by the liaison.

5 In another embodiment of the present invention, digital signature verification software, such as Sign-It for Microsoft Word and Adobe Acrobat 4.0, available from Communication Intelligence Corp., 275 Shoreline Drive, Suite 500, Redwood Shores, California, 94065-1413, may be used with the present invention.

10 In situations where wireless communication is unavailable or becomes temporarily disabled, the liaison may collect data for later use, which is commonly referred to as "store and forward." When wireless communication becomes available, the liaison preferably may retrieve the stored data and collaborate with the remote engineer.

15 In addition to the above listed applications, computer 5000 may use any other software applications that facilitate collaboration between the liaison and remote engineer to resolve an on-site problem. Software applications that may be used with the present invention preferably include some or all of the following features: whiteboard, redlining, video and VoIP technology, information sharing, and peer to peer file transfer. Software such as Microsoft Exchange may be used as the collaborative software according to the present invention. Computer 5000 may also be used to store voice and video data for future
20 reference.

At locations where the use of a WLAN is not feasible or available, long range wireless LAN communication, as available from BreezeCom, 5858 Edison Place, Carlsbad, California, 92008, for example, may be used to establish wireless communication. If long range wireless LAN communication is not available, satellite based communication, as
25 available from DirecPC, 11717 Exploration Lane, Germantown, Maryland, 20876, for

example, may be used to establish wireless communication. In addition to these examples, any other type of wireless communication may be used with the present invention.

As shown in FIG. 2, battery 6000 supplies power to computer 5000 using
5 power cable 6100. Battery 6000 is stored in battery housing 6200, which preferably supports battery 6000 from harness 7000. In a preferred embodiment of the present invention, battery 6000 is two Molicel ME202BB batteries, available from E-One Moli Energy Limited, North American Sales Office and Production Facility, Maple Ridge, BC, Canada, V2X 9E7. The Molicel ME202BB is preferred because of its high energy density characteristics and thermal
10 resistance. The Molicel ME202BB is the battery that is shipped with the ViA IIB computer. The Energy Access SBS series smart battery charger that is also shipped with the ViA IIB computer is likewise preferred because it uses “smart charging technology” that allows the battery to be charged at various levels of discharge with diminished risk of developing battery “memory” or overcharging the battery. This battery supports Microsoft Windows Power
15 Management, which will display the percentage of power remaining in the battery, can be set to send a warning message when the battery charge is reduced to a certain level, and allows the “hot-swapping” of batteries. In addition, this battery includes a touch sensitive film switch on the battery itself with a relative power indicator.

As shown in FIG. 1, the present invention preferably may also include an
20 interface hub 7000 that may be used to add additional peripheral devices to the present invention and/or to simplify the connection of components to computer 5000. In a preferred embodiment of the present invention, interface hub 7000 may be a Targus Multiport 4 Port USB Hub, Model No. PA06OU, available from Targus, Inc., 1211 N. Miller St., Anaheim, California 92806. The use of a Targus 4 Port USB Hub provides the ability to add additional
25 USB devices to the present invention.

In another preferred embodiment of the present invention, hub housing 7200, which secures interface hub 7000 to harness 8000, may also be used to store general inspection camera 1000 when general inspection camera 1000 is not in use.

5 5. Harness

As shown in FIG. 1, FIG. 2, and FIG. 4 harness 8000 preferably is used to support general inspection camera 1000, detailed inspection camera 2000, wireless telephone 3000, display unit 4000, computer 5000, battery 6000, and interface hub 7000 from the body 10 of the liaison wearing the present invention. Referring to FIG. 4, a preferred embodiment of harness 8000 is a modified "back support belt" commonly worn by warehouse workers to ease the strain of lifting and long hours standing on concrete floors. An inner belt 8100 is a typical adjustable back support belt preferably with an outer hook and pile fastener tape surface. In addition to hook and piling fastener tape, any other method of fastening may be used such as buttons, snaps, and zippers. Inner belt 8100 preferably is adjustable to many 15 body types because it is fastened using a hook and piling fastener tape patch (not shown) located on the inside surface of an outer flap 8110. An adjustable outer belt 8200 preferably constructed from nylon is positioned over inner back support belt 8100 and is held in place using support loops 8210 that are secured to the outer surface of inner belt 8200. Outer belt 8200 preferably is adjustable and may have its ends fastened to one another using clasp 8230 20 as shown in FIG. 4. The ends of belt 8200 may also be secured to one another using any other suitable fastening means including, without limitation, buckles, snaps, button, hook and pile fastener tape, and clips. Harness 8000 as shown has the added benefit of providing additional lumbar support to the liaison wearing the present invention.

Detailed inspection camera 2000, wireless telephone 3000, display unit 4000, 25 computer 5000, battery 6000, and interface hub 7000 may be supported from outer belt 8200

by running outer belt 8100 through support loops (not shown) located on the inside surfaces of detailed inspection camera storage case 2200, wireless telephone housing 3200, display housing 4200, computer housing 5200, battery housing 6200, and hub housing 7200. In a preferred embodiment of the present invention, hook and pile fastener tape patches sewn onto the support loops located on the inside surfaces of detailed inspection camera case 2200, wireless telephone housing 3200, display housing 4200, computer housing 5200, battery housing 6200, and hub housing 7200 prevent the various components from sliding about inner belt 8200 because the hook and pile fastener tape patches on the support loops adhere to the outer hook and pile fastener tape surface of inner back support belt 8100. This preferred embodiment has the added benefit of allowing other components such as additional storage pockets to easily be supported from outer belt 8200. In addition, this embodiment allows for the reconfiguration, addition, or deletion of various components depending upon the liaison's needs. In addition to this preferred embodiment, any fastening means including snaps, buttons, zippers and clips may be used to support the components from harness 8000.

As shown in FIG. 4, harness 8000 also comprises adjustable shoulder straps 8300 and 8400 that provide additional support for the liaison wearing the present invention. Shoulder straps 8300 and 8400 preferably are adjusted so that inner back support belt 8100 is properly positioned on the liaison.

As shown in FIG. 4, cable conduits 8610 and 8620 preferably are incorporated into harness 8000 to prevent the cables used in the present invention from causing inconvenience or snagging. As shown in FIG. 4, cable conduit 8610 preferably runs along the upper edge of inner belt 8100 and cable conduit 8610 runs along the outside of shoulder strap 8300 and 8400. In addition to this embodiment, cable conduits may be positioned at any other suitable location in harness 8000.

Cable conduits 8610 and 8620 preferably are constructed from two-sided hook and pile fastening tape. One edge of the tape is secured to harness 8000 using stitching or any other suitable fastening means including, without limitation, snaps, buttons, zippers, or clips. The other edge of the tape remains free. The cable to be passed through the conduit preferably is rolled into the tape, enclosing the cable in the conduit. An advantage of using the hook and piling fastening tape in this embodiment is the ability to create an aperture at any point along the conduit to permit the cable to exit the conduit. Corresponding apertures may be made at other location throughout the cable conduits to permit the cables to be appropriately positioned.

In addition to the above example, any other suitable material may be used to construct cable conduits 8610 and 8620, and cable conduit may be positioned at any appropriate location on harness 8000.

Harness 8000 as shown in FIG. 1, FIG. 2 and FIG. 4 is a preferred embodiment of the present invention. However, there are numerous other means that may be used to support general inspection camera 1000, detailed inspection camera 2000, wireless telephone 3000, display unit 4000, computer 5000, battery 6000, and hub housing 7200 from the body of the liaison. For example, a harness could be used that incorporates pockets to hold the various components. In addition, a harness could be used that has high-resolution storage case 2200, wireless telephone housing 3200, display housing 4200, computer housing 5200, battery housing 6200, and hub housing 7200 fastened to the outside surface of the harness at suitable locations on the body 10 of the liaison wearing the harness as shown in FIG. 1, and FIG. 2.

Whereas the present invention has been described with respect to specific embodiments thereof, it will be understood that various changes and modifications will be

suggested to one skilled in the art and it is intended that the invention encompass such changes and modifications as fall within the scope of the appended claims.

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

What is claimed is:

1. A wearable computer system for use in collaborative situations,

comprising:

a general inspection camera;

a detailed inspection camera;

a display;

a computer adapted to:

(a) receive image and other data from said general inspection camera,

(b) receive image and other data from said detailed inspection camera,

(c) exchange data with said display,

(d) exchange data by wireless communication,

(e) facilitate collaborative applications between an onsite liaison and a remote engineer;

a battery to supply power to said low resolution camera, said high resolution camera, said display, and said computer;

means for exchanging audio data with a remote station; and

a harness for supporting said general inspection camera, said detailed inspection camera, said display, said computer, said battery, and said means for exchanging audio data from the body of a user.

ABSTRACT OF THE DISCLOSURE

An apparatus and method for using a wearable computer in collaborative applications that uses a general inspection camera, a detailed inspection camera, a display, a
5 computer adapted to use wireless communication and to facilitate collaborative applications, a battery, an audio communication device, and a harness for securing these components to a person's body.

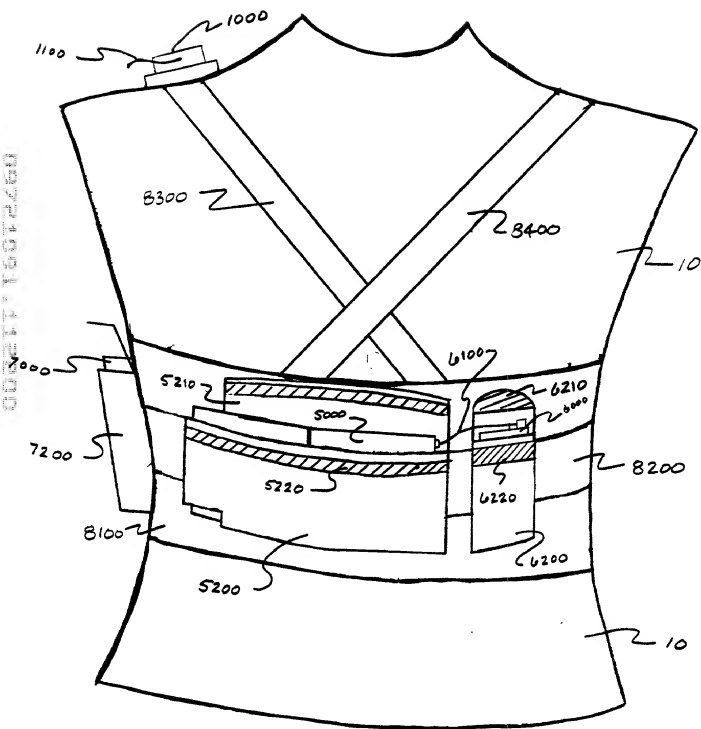


FIG. 2

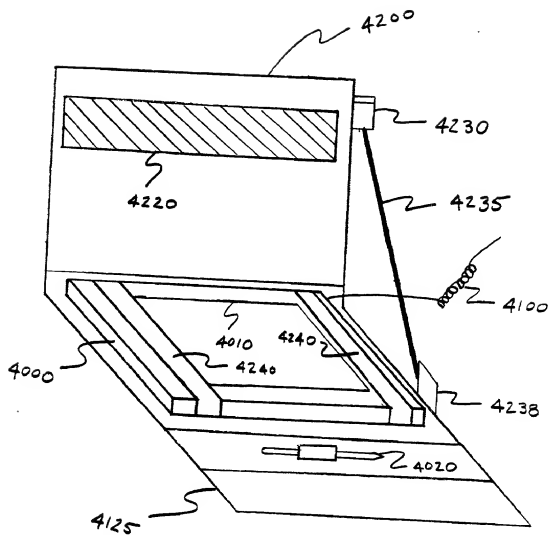


FIG. 3

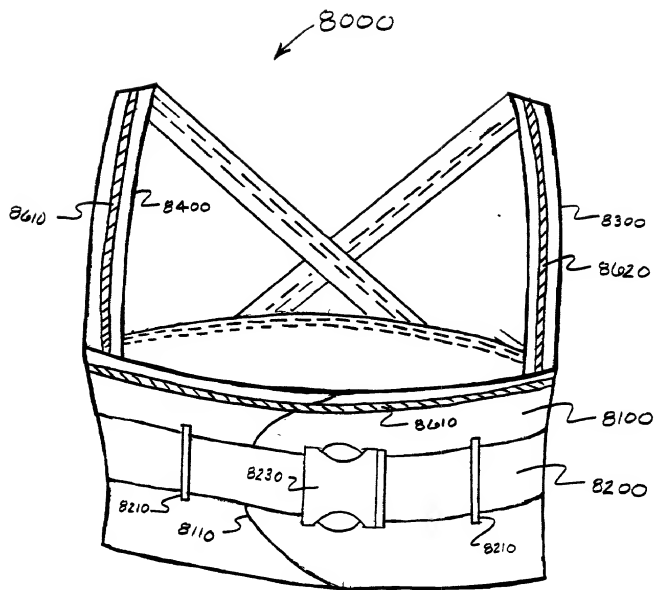


FIG. 4

Please type a plus sign (+) inside this box → ☒

PTO/SB/01 (10-00)

Approved for use through 10/31/2002 OMB 9651-0032

U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

☒ Declaration
Submitted
with Initial
Filing

OR

☐ Declaration
Submitted after Initial
Filing (surcharge
(37 CFR 1.16 (e))
required)

Attorney Docket Number	10001-22620.2
First Named Inventor	Vincent Quintana
COMPLETE IF KNOWN	
Application Number	/
Filing Date	November 22, 2000
Group Art Unit	Unknown
Examiner Name	Unknown

As a below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**Apparatus and Method for Using a Wearable Computer in
Collaborative Applications.**

(Title of the Invention)

the specification of which

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY)

as United States Application Number or PCT International

Application Number

and was amended on (MM/DD/YYYY)

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES	NO
			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

Please type a plus sign (+) inside this box → ☒

PTO/SB/01-10-001

Approved for use through 10/31/2002 OMB 0651-0032

U.S. Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to

☐ Customer Number
or Bar Code LabelOR ☒

Correspondence address below

Name **Mark P. Vrla**Address **Jenner & Block**Address **One IBM Plaza**City **Chicago,**State **IL**ZIP **60611**Country **USA**Telephone **312/222-9350**Fax **312/527-0484**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR :☐ A petition has been filed for this unsigned inventor

Given Name

Vincent

Family Name

Quintana

(first and middle (if any))

or Surname

Inventor's

Signature

Date

Residence: City

Bath

State

ME

Country

USA

Citizenship

Mailing Address **712 High Street**

Mailing Address

City

Bath

State

ME

ZIP

04530

Country

USA**NAME OF SECOND INVENTOR:**☐ A petition has been filed for this unsigned inventor

Given Name

F. Christopher

Family Name

Mitchell

(first and middle (if any))

or Surname

Inventor's

Signature

Date

4846A South 28th StreetCity **Arlington**State **VA**ZIP **22206**Country **USA**☒ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.

Please type a plus sign (+) inside this box → ☒

PTO/SB/02A (11-00)

Approved for use through 10/31/2002 OMB 5651-0032

U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION	ADDITIONAL INVENTOR(S) Supplemental Sheet Page <u>3</u> of <u>4</u>
--------------------	---

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Michael Edward		Pinkham	
Inventor's Signature		Date	
Residence: City Bath	State ME	Country USA	Citizenship
Mailing Address 219 Whiskeag Road			
Mailing Address			
City Bath	State ME	ZIP 04530	Country USA
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
J. Scott		Houston	
Inventor's Signature		Date	
Residence: City Topsham	State ME	Country USA	Citizenship
Mailing Address 18 Alphonse Drive			
Mailing Address			
City Topsham	State ME	ZIP 04086	Country USA
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Mark A.		Norton	
Inventor's Signature		Date	
Residence: City Cushing	State ME	Country USA	Citizenship
Mailing Address 378 Gay Island			
Mailing Address			
City Cushing	State ME	ZIP 04563	Country USA

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box ☒

PTO/SB/024 (11-02)

Approved for use through 10/31/2002. CMB 3651-0032

U.S. Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no person is required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)

Supplemental Sheet

Page 4 of 4

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Joseph		Petruska	
Inventor's Signature		Date	
Residence: City	Sabbatus	State	ME
Country	USA	Citizenship	
Mailing Address 50 Lisbon Road			
Mailing Address			
City	Sabbatus	State	ME
ZIP	04280	Country	USA
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Inventor's Signature		Date	
Residence: City		State	
Country		Citizenship	
Mailing Address			
Mailing Address			
City		State	
ZIP		Country	
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Inventor's Signature		Date	
Residence: City		State	
Country		Citizenship	
Mailing Address			
Mailing Address			
City		State	
ZIP		Country	

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231